Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

# LOFAR

## Low Frequency Array

# LOFAR International Site preparation document

### Abstract

This document is intended to be used as input for those organizations who envisage taking part in the LOFAR project and network and who have the intention to purchase a LOFAR station. The document forms a source of information upon which can be decided if a location is more or less suitable to build a LOFAR station. In order to arrive at a good decision, the document contains a number of "must haves" for a minimum performance and to achieve the best results the recommendations should be followed as well to the point that is still practical.

Verified:			
Name	Signature	Date	Rev.nr.
C. Vogt			

	Accepted:	
Work Package Manager	System Engineering Manager	Program Management
M. Bentum	A. Gunst	J. Reitsma
	M. Bentum	M. van Haarlem

### © ASTRON 2008 All rights are reserved. Reproduction in whole or in part is prohibited without written consent of the copyright owner.



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat		Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

## **Distribution list:**

Group:	Address	For Information:
Reitsma, Jan Bentum, Mark Huijgen, Arie Koopman, Yde Norden, Menno Vogt, Corina Maat, Peter van Haarlem, Michiel Vermeulen, Rene ASTRON team	reitsma@astron.nl bentum@astron.nl huijgen@astron.nl koopman@astron.nl norden@astron.nl vogt@astron.nl maat@astron.nl haarlem@astron.nl rvermeulen@astron.nl	

## **Document history:**

Revision	Date	Section	Page(s)	Modification
1	1-5-2007	All	All	Creation (including Effelsberg comments)
1.1	January 2008	All	All	Changing scope
1.2	April 2008	All	All	New section 2.5 added containing more detailed specifications (input from Corina Vogt)
1.3	April 2008	4.2 5.4	18 33	Remark added regarding the purpose of the LBA foil
1.4	June 2008	All	All	Adding WAN requirements, and remarks about foundation for container, overall check



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

Table of contents:	
1 Introduction	
1.1 Scope and limitations	
1.2 Definition of LOFAR	
1.3 Background design information	
1.4 Glossary	6
1.5 Applicable and reference documents	
1.5.1 Applicable documents	
1.5.2 Reference documents	
2 LOFAR Station description and specification	8
2.1 Physical parameters of a station	
2.1.1 Station electronics	10
2.1.2 Electrical parameters	
2.1.3 LBA and HBA field specifications	11
2.2 Preferred site location and environment	12
2.3 The site properties	13
2.4 Station lay-out specification justification and background information	13
2.5 Non-Astronomical applications (optional)	15
3 LOFAR Station site evaluation	17
3.1 Site evaluation check list	17
3.2 EMI/RFI environment	18
4 Customer support	19
4.1 Overview of support tasks	19
4.2 Field preparation and equipment placing	19
4.3 Infrastructure	21
4.3.1 Power infrastructure	21
4.3.2 Data transport infrastructure	21
4.4 Safety	
4.5 Resources and logistics	25
4.6 Deliverable items list	26
5 Annexes	27
5.1 Annex 1 Reference site layout (examples)	27
5.2 Annex 2 Container foundation drawing	29
5.3 Annex 3 Reference schedule for preparations	
5.4 Annex 4 LOFAR station building example	
5.5 Annex 5 Inspection checklist	41



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat		Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

## 1 Introduction

This document is intended to be used as input for those organizations who have the intention to purchase a LOFAR station and who envisage taking part in the LOFAR project and network. It will form a source of information upon which can be decided if a location is more or less suitable to build a LOFAR station. In order to arrive at a good decision, the document contains a number of "must haves" for a minimum performance and to achieve the best results the recommendations should be followed as well to the point that is still practical. It may be very well possible to improve the site and environment at a later stage based on the results of the scientific data analysis.

In this document you will find requirements, recommendations and guidelines for the site location and environment and the preparation of the site, requirements to the infrastructure, placement and installation of equipment, resources needed.

This document will not elaborate on functional, performance and operational aspects of a LOFAR station because these are documented elsewhere and will be agreed separately.

It is suggested that the customer sends a representative to LOFAR/ASTRON in order to familiarize with the LOFAR equipment and to get hands-on experience regarding installation and maintenance of a station.

## 1.1 Scope and limitations

The purpose of this document is to assist with the search for potential LOFAR site locations and for planning of site preparation work in case the search proved to be positive. Specific issues, in particular the lay-out of the antenna fields and the RFI conditions, of the selected LOFAR site locations will be different with regard to the specifications and requirements mentioned in this document and should be discussed with LOFAR specialists. These specific issues will be covered in separate documents and drawings.

This specification does not cover aspects like:

- Cost issues
- Operations and operations fee
- · Agreements with CEP regarding use of storage, processing time allocation etc
- Publications
- Data ownership
- Disposal phase
- Contractual issues

## 1.2 Definition of LOFAR

The LOFAR Phase 1 Baseline consists geographically of a Compact Core area in the North-East of the Netherlands and Remote Stations in the area around the core; with a maximum baseline of ~100 km. Stations are oriented such that future extensions towards Potsdam (~EW) and Limburg (~NS) add significantly to the spatial sampling for the astronomy applications. Longer baseline European extensions are possible as well (e.g. towards existing astronomical observatories like Onsala, Effelsberg, Tautenburg, Chilbolton and Nançay).

The ICT infrastructure of LOFAR holds great potential for non-radio astronomers, enabling them to make strides in monitoring at an accelerated pace. In the geosciences field, it should be possible, for example, to extend the understanding of natural and induced seismicity, subsidence, and water management. The Technical University of Delft, the Royal Dutch Meteorological Institute (KNMI) and TNO-NITG are participating in the application of LOFAR in the geosciences.



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

The advanced network of fiber optics will transport also geoscientific measurement data. The following are some of the activities the geoscientific participants in the consortium will be involved in:

- Seismic applications
- Infra-sound applications
- GPS/INSAR applications on subsidence
- Groundwater monitoring
- Pressure and temperature monitoring

In the Core area, with 2 km in diameter, there will be a minimum of 18 stations; each station will consist of Low Band and High Band Antennas. The number and configuration of geophones, hydrophones and micro barometers in the Core area is yet to be defined. Selected stations will be equipped with additional sensors for the agriculture application.

Each Remote Station will be equipped with High Band antennas, Low Band antennas, seismic sensors, micro barometers (for infrasound detection) and several auxiliary systems e.g. for weather monitoring and GPS time/position measurements.

Remote stations will be connected by 10 GbE technology to the Central Processing systems (CEP). The sensor data will be dominated by the astronomical antennas (about 2.2 Gb/s, being the equivalent of a single dual-polarized beam over 32MHz, so 1x32MHz or 8x4MHz etc). For the astronomy application, full Tied Array beam forming will be supported. Transient detection will be supported. Buffering of the full sampled bandwidth and limited triggering will be available at station level.

For international connections the data from the international sites will be transported to CEP. The total datarate is equivalent to the stations in the Netherlands, about 2.2 Gb/s of sampled data and somewhat overhead for metadata and monitoring and control. This requires a 3 Gb/s fiber connection, to be realized by either three 1 Gb/s connections or one 10 Gb/s connection.

For International sites it may not be obvious to combine other applications with the astronomical purposes. If there are intentions to accommodate other applications on or near the astronomical site there are a few important interface criteria that will be mentioned in section 2.5 of this document.

## 1.3 Background design information

In this chapter some aspects that are considered important for the Astronomical Applications are discussed below:

- Low Band Antenna element, optimized for the 30-80 MHz range, with a sharp cut-off filter above 80MHz. The suppression below 30MHz will be matched to the environment. The Low Band antenna elements can be used down to 30 degrees elevation.
- High Band antenna can be used between 120-270 MHz.
- The FM band is suppressed in the antenna amplifier for both antennas to minimize intermodulation products from FM transmitters.
- Broadband integrated receiver and digital processing system. The receiver uses direct conversion of a 80/100 MHz band. Each receiver is connected to a Low Band antenna and to a High Band Array tile; only one of these can be selected at a time. (Note that there is also a third input available on the receiver units: The Low Band Low Antenna. However, this will not be part of the baseline.) The 100 MHz signal will be buffered for ~1 sec for Cosmic Ray detection and Transient Processing. In the first digital processing step 156/196kHz sub-bands are formed. Only a subset of these bands is further processed. The maximum total bandwidth selected for further processing will be 32 MHz. Each Remote Station delivers a single dual polarized beam at 32 MHz, or 8 dual polarization beams at 4 MHz. The resulting output data rate is about 3 Gb/s. The secondary filtering stage (to 1kHz channels) is done in the Central Processing system.



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat		Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

## 1.4 Glossary

This section provides the meaning of the abbreviations used in this document. A more elaborated description of definitions and terms is provided in "LOFAR Terms, definitions and abbreviations", LOFAR-ASTRON-RPT-002 (RD.7)

ADD BCK CCU CEP E-LOFAR EMC EOR HBA HW JTB JTAG LBA LCU LNA LOFAR MAC MOM NAA RCU RFI RSP SPU SW TBB TBC TBD TBW UHECR WAN	Architectural Design Document Backplane Central Control Unit CEntral Processing International LOFAR Station Electro Magnetic Compatibility Epoch of Re-ionisation High Band Antenna Hardware JTAG Test Board Joint Test Action Group Low Band Antenna Local Control Unit Low Noise Amplifier Low Frequency Array Monitoring And Control Minutes of Meeting Non-Astronomical Applications Receiver Control Unit Radio Frequency Interference Remote Station Processing Board Station Power Unit Software Transient Buffer Board To Be Confirmed To Be Defined, Determined To Be Written Ultra High Energy Cosmic Rays
UHECR	Ultra High Energy Cosmic Rays
WAN	Wide Area Network



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

### **1.5** Applicable and reference documents

### **1.5.1** Applicable documents

The LOFAR applications design shall comply with the list of applicable documents, to the extent stated herein. In case of conflict this specification shall have precedence.

No.	Document Number	lssue/rev	Title
AD.1	EN55022-B		EMC standards
AD.2	IEC 61000 -4-3		Radiated immunity
AD.3	IEC 61000 -4-6		Conductive immunity
AD.4	IEC 62305		Protection against lightning
AD.5	LOFAR-ASTRON-PRC-004	1.0	LOFAR Change Control Procedure
AD.6	LOFAR-ASTRON-MEM-231	1.0	LOFAR cabinet spurious emissions measurements above 300 MHz

### 1.5.2 Reference documents

The following list of reference documents provide a description of the design of LOFAR, the central system and its stations seen from the astronomical point of view. They can be used as a source of background information for the interpretation of the requirements in this document and may be helpful for the design of applications other than astronomical.

No.	Document Number	lssue/rev	Title
RD.1.	LOFAR-ASTRON-MEM-145	2.0	LOFAR phase I baseline
RD.2.	LOFAR-ASTRON-SRS-001	4.2	System Requirement Specification
RD.3.	LOFAR-ASTRON-SRS-012	1.0	Station Requirement Specification
RD.4.	LOFAR-ASTRON-ADD-006	2.0	System ADD
RD.5.	LOFAR-ASTRON-ADD-013	1.0	Station ADD
RD.6.	LOFAR-ASTRON-MEM-142	Xx	LOFAR remote station baseline
RD.7.	LOFAR-ASTRON-RPT-002	2.0	LOFAR abbreviation and glossary
RD.8.	TBW		LBA mounting procedure
RD.9.	TBW		HBA mounting procedure



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

## 2 LOFAR Station description and specification

The configuration of an international LOFAR station consists of:

- 2 astronomical sensor fields with a minimum size of 75 x 75 meters
- 1 modified sea container that includes an RF tight section for station electronics

Note: If desired the antenna fields can be augmented with an optional sensor field including equipment cabinet that can be used for non-astronomical purposes (see 2.5).

The sensor fields contain the following sensor types:

- One astronomical sensor field (the LBA field) contains up to 96 LBA antennas
- The other astronomical sensor field (the HBA field) contains up to 96 tiles containing each 16 HBA antenna elements.

The astronomical application will be considered in this document. A general description of the station can be found in RD.1 "LOFAR Remote Station Baseline", document LOFAR-ASTRON-MEM-142. The reference documents RD.4 and RD.5 provide a description of the LOFAR respectively station design. Summarizing the following components will be needed for a station:

Item	Quantity
LBAs	96
HBA tiles	96
HBA element per tile	16
Modified sea container with 4 x 19" racks containing all station	1
electronics (detailed in chapter 2.1.1)	
Coax cables to LBA field	192
Coax cables to HBA field	192

## 2.1 Physical parameters of a station

The physical location and orientation of the container shall be relative to the antennas as indicated in Figure 2.1-1 or Figure 2.1-2. However these are general pictures. The LBA, HBA and Non-Astronomical field positions may depend on the site dimensions that are locally available. Each site will be different in size and will be oriented in another way and therefore the sensor layout for each site shall be determined specifically and mutually agreed between the LOFAR applications. The position and orientation of the container with station electronics can be selected in such a way that it complies best with the site layout and maximum length of the supplied coax cables. For scientific reason, it is preferable to place the container north of the antenna fields to avoid obstructing the view to the southern horizon. RFI properties of the container do not play a role in the layout considerations, because the supplied container will be RF tight i.e. the RF attenuation is > 80 dB over a frequency range of 100 kHz to 10 GHz. (The optional NAA cabinet should have an attenuation of > 40 dB over a range from 100 kHz – 300 MHz.)




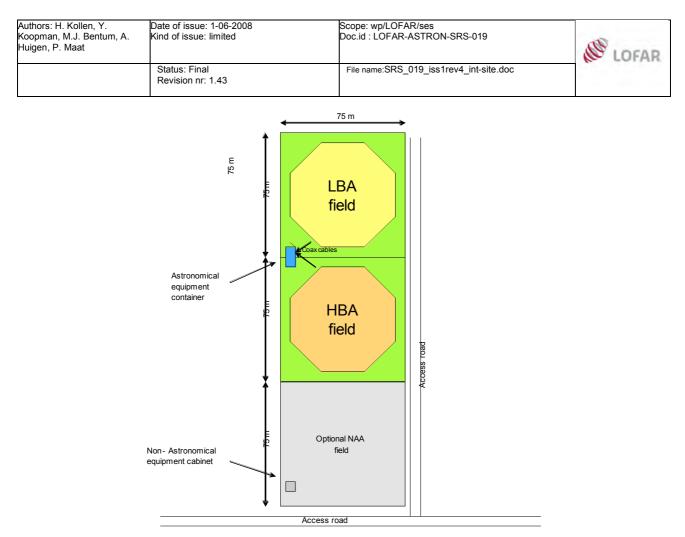


Figure 2.1-1 Remote station layout example 1





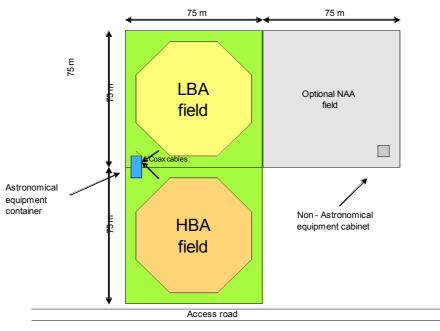

Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat		Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

### 2.1.1 Station electronics

The station electronics will be housed in an RF tight compartment that is part of a modified sea container. In the RF tight compartment 4 equipment racks (19") are placed that hold the station electronics. The container is equipped with air-conditioning in order to keep the temperature of the electronics in their operational range.

The container has the following provisions and specifications:

RF attenuation
 Size (width x depth x height)
 Weight:
 Colour of container:
 Operation temperature range:
 > 80 dB @ 100 kHz to 10 GHz
 2.5 x 6 x 2.9 m
 approx. 4500 kg
 In consultation with ASTRON/LOFAR
 20 °C to +40 °C

The container will be resting on a foundation in the form of a cast concrete plate of  $3.5 \times 7.5$  meters. The concrete plate needs specific feedthrough holes and guiding provisions for power, data and the coax cables coming from the antennas, see the drawing in annex 5.2. A more detailed description of the container can be received upon request will be part of the station documentation.

### Station electronics compartment in container

The LOFAR station electronics is contained in four interconnected 19" racks. The first three racks contain receiver subracks and the other rack holds the control equipment, time reference equipment, switches and the power supply. The building practice is 19".

### Receiver racks (number 0, 1 and 2) layout:

Two (2) receiver subracks per rack, in total six (6) subracks with each:

- 32 RCU (Receiver Unit) boards
- 4 RSP (Remote Station Processing) boards
- 1 backplane
- 1 SPU (Sub-rack Power Unit)
- 2 TBB (Transient Buffer) boards
- 1 TDS (Time Distribution System) board
- 1 JTB (JTAG Test Board)

### Control, interface and power equipment rack (number 3) layout:

- 3 phase mains filter
- mains power distribution panel
- Power unit (+48V DC)
- LCU (Local Control Unit)
- Two Ethernet switches, including fibre modules
- Glass fibre termination/splice unit
- GPS receiver
- Rubidium clock

Two antenna cable feed through panels with each 2 times 96 inputs (mounted to the RF compartment wall) Additional panel for future inputs (mounted to the RF compartment wall)

### 2.1.2 Electrical parameters

This chapter provides an overview of some important electrical parameters.

### **Power specification**

Maximum power consumption 3-phase of total station, equal load per phase\*): 15 kW \*) including 1200 W for air-conditioning (TBC)



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat		Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

Maximum power dissipation in container (excluding air-conditioning):8.8 kWMaximum power dissipation/consumption antennas LBA + HBA:5 kW

#### Data interface specification

Station maximum data rate

#### **Connector types**

LBA antenna connector: HBA antenna connector: Data cable connector (as delivered) F-connector F-connector Glass fibre ST-connector

1x 10 Gb/s

#### Antenna Cabling:

Delivered in standardized lengths including connectors: ranging from approx. 50 up to 130 m, Coax-9 cable, F-connector

### 2.1.3 LBA and HBA field specifications

This section provides general and more specific requirements for the LBA and HBA fields of international LOFAR stations. The justification and some background information for these field specifications is provided in chapter 2.4.

#### General specifications and recommendations for LBA and HBA fields:

- Antennas should be placed on a plane that does not need to be parallel to the LOFAR core fields, i.e. the plane can have an inclination
- The HBA & LBA fields do not need to be on the same plane nor do they need to be parallel to each other
- Antennas should be set up normal to the plane
- No outlier dipoles are required
- Random single footprint for the LBA station layout
- HBA tile layout most likely regular; confirmation tests still need to performed
- Footprint rotated by certain angle from station to station including correction for longitude and latitude. Reference: Effelsberg, LOFAR will provide the exact antenna positions for the various international LOFAR stations
- LBA dipoles and HBA dipoles should be parallel oriented within a station to +/-2° accuracy (maximum deviation)
- LBA and HBA dipoles should be as parallel as possible across all LOFAR stations (including E-LOFAR stations)

### LBA field specific requirements:

- Nominal field size:
- Amount of LBA antennas:
- Ground plane size:
- Flatness requirement of the field
- Antenna orientation
- Deviation in antenna orientation
- Deviation of angle between the 2 poles of the v
- Maximum length LBA cable
- Nominal cable depth in ground

### HBA field specific requirements:

Nominal field size:



<sup>©</sup>ASTRON 2008

approximately 75 x 75 m. square. 96 3 x 3 m. <u>+</u> 6 cm (rms deviations, the systematic error much smaller) ≤ 1 degree ≤ 1 degree ≤ 5 degrees 115 m. 60 cm

approximately 75 x 75 m. square.

Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	
<ul> <li>Amount of HBA</li> <li>HBA tile size</li> </ul>	tiles:	96 5 x 5 m	
<ul> <li>Intertile distance</li> </ul>	•	60 cm	


- Flatness requirement of the field
- Tile antenna orientation
- Deviation of antenna position from specified coordinate
- Maximum length HBA-tile cable
- Nominal cable depth in ground

50  $5 \times 5 m$  60 cm  $\pm 3 \text{ cm} (\text{rms deviations, the systematic})$  error much smaller) ≤ 1 degree ≤ 1 degree 130 m60 cm

### 2.2 Preferred site location and environment

The astronomical performance of a station is depending on the location and its environment (now and in the future). A station site is preferably located in a fairly isolated place which is 2 km remote from overhead power lines nearby and relatively far from any highways, roads with heavy traffic, railroads or tramways. It is also not located nearby villages or towns. High windmills used to generate electrical power will also influence the station performance if located within 2 km. It should be investigated if no other radio interference sources are present in the neighbourhood.

The station is best located in a rural area or in or at the fringe of a nature reserve. The latter will require good communication with environmentalists and nature organizations. In rural or forested areas one should take into account that the land up to 100 m around the site itself should be clear of any high trees or structures. At the south border of the site this free area should be about 200 m, because nearby trees or structures higher than 20 m will influence the maximum viewing angle of the antennas (based on a desired minimum elevation angle of 10 degrees).

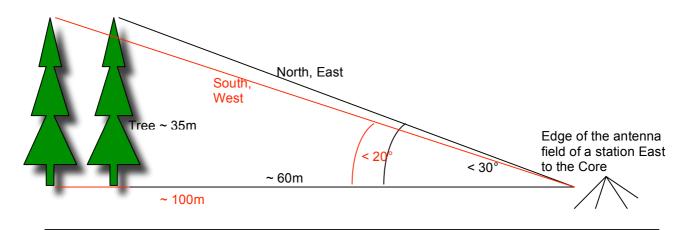

In conclusion, the trees or a dense forest might block the field of view of a LOFAR station down to low elevations. The accessibility of low elevations is crucial for Jupiter and solar observations in the winter as well as for observations of sources with overlap of optical telescopes in the Southern Hemisphere. From these scientific considerations, the minimal requirement for the field of view of a very remote LOFAR station is a view down to 30° elevations in all directions for all antennas in a station. If possible, a clear view down to 20° elevations in all directions especially towards South for all antennas in a station is preferred. Even access to lower elevations of about 5°-10° especially towards South might be desired scientifically but are not necessary. Furthermore, one could take into account that stations east from the LOFAR core might want to be able to observe further down into the western direction and vice versa. The same applies for Northern and Southern stations. The little geometric exercise implied (for a station East of the LOFAR core) is depicted in figure above. Note that the distances depend on the height of the trees.



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat		Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

Please note that it will be necessary to bury the cables in trenches with a nominal depth of 60 cm and therefore it is recommended that the land to be acquired should be declared free of any potential archaeological findings. The depth can be adjusted to the local situation of the soil. Burying the cables will prevent damage by e.g rodents or maintenance equipment.

## 2.3 The site properties

The site should be accessible by at least a macadam or sandy road in order to get the equipment on the fields. The gross dimensions of the site to be acquired should be in the order of 3 - 4 ha (200 x 200 mtr), but different sizes up to a width of 100 meter are possible as well. The site should be sufficiently large to fit a LBA and HBA field (see Figure 2.1-1and Figure 2.1-2) including some space for a service driveway and ditches or other natural barriers if required. If it is preferred to locate the site on land owned already by an institute, the minimum LBA and HBA field dimensions (preferably 75 x 75 m per field) have to be respected. The surface should be as horizontal as possible (see section 2.1) and it should be drained well enough to prevent collection of water on the LBA ground planes during prolonged periods of time (e.g. < 30 minutes). Water on the ground planes will change the performance of the LBA.

It is obvious that metallic or electric fences to separate the site from the surrounding should not be used, because these will have an impact on the performance of the station. However by using natural barriers (ditches, swamps, and hedges) entrance can be made difficult regarding inadvertent access of public and animals. Stations will be delivered by ASTRON/LOFAR without any fences. Rodents are a threat for any unprotected cabling above ground.

A threat for the coax cables that are buried in the ground is a rocky soil, sharp rocks may damage the cables and either protection or local removal of the rocks is recommended.

## 2.4 Station lay-out specification justification and background information

### An E-LOFAR station field

In the course of the re-scope discussions, it was recommended that an international LOFAR station also called "E-LOFAR station" should consist of 96 LBAs and 96 HBA tiles. All LBAs or all HBA tiles should be operable at the same time. This was recommended to increase the sensitivity on the long baselines, which can be up to a 1000km.

The station area should be planar for the LBA field and the HBA field. The area might have an inclination but the antenna fields should be planar to an accuracy of about +/- 6 cm for LBA and +/-3 cm for HBA. These numbers are rms values for random deviation. However, the systematic error should be much smaller (see figure below). The LBA and the HBA field do not need to be in the same plane nor do the planes need to be parallel to each other. However, the exact locations of the antennas must be known.



Both situations fulfil the +/- rms requirements, but the systematic error is very different

The required planarity is justified by the following arguments. The Ruze formula gives an initial requirement of an accuracy of  $\lambda/25$ , i.e. +/-15cm for LBA (at 3.75m) and +/- 5cm for the HBA (at 1.25m).

Because of height differences of antennas the beam pattern will differ from station to station which produces different beam patterns for the various stations. This will have the biggest effect on the far side lobes where these small variations can have a large impact. These side lobes introduce artifacts.



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat		Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

In order to achieve beam patterns that are as similar as possible, the station area should be as planar as possible. Therefore, as a minimum requirement for LOFAR, an accuracy of +/-6 cm for the LBA field and +/-3cm for the HBA field is requested for an E-LOFAR station (see chapter 2.1.3). The antennas should be erected normal to the plane.

### E-LOFAR Antenna footprints

### LBA Outlier dipoles

During the re-scope discussion, the concept of the outlier dipoles has been introduced. These were suggested to support station calibration of the re-scoped core and remote stations, as it seems difficult to calibrate a 48 LBA station. In addition the CR application can profit from these outlier dipoles as it increases the footprint of a station.

However, for an E-LOFAR station 96 LBAs are planned. Such a station can be calibrated without outlier dipoles. The Cosmic ray application does not benefit for the E-LOFAR station from the larger footprint. In addition it is easier to place the antennas and the electronics (i.e. the cabinets and cables) without outlier dipoles. Thus, it is suggested to abandon the idea of outlier dipoles for E-LOFAR stations.

### LBA field layout

The 96 LBAs will be placed in a random fashion following the layout in Figure 5.1-1. A single random configuration has been chosen already to suppress side lobes. It is possible to adapt the position of a couple of the outer antennas so that the LBA station field fits within the constraints given by the land available.

#### HBA field layout

An HBA tile is 5m by 5m wide. They will be most likely placed in a regular grid. The intra-tile distance is 60 cm. The final HBA tile station layout needs to be confirmed by tests that are ongoing.

### Rotation of antenna fields

The far side lobes of the station beam are a concern for LOFAR calibration. One strategy to average them out is to rotate the station footprint from station to station. The rotation angles should range over 360 degree. As the layout of the E-LOFAR stations is different from the core and remote stations only about 15-17 possible rotation angles are needed. As the beam patterns are symmetric, the rotation of the station footprint should not be symmetric. Symmetric rotation will not have the effect of cancelling side-lobes. The suggestions is thus to define about 23 rotation angles to chose from, i.e. steps of 15.65°. In addition, one should correct for latitude and longitude differences. A spread over 360° should be achieved in the areas north-east from Exloo, south and north-west from Exloo. The rotation angle is defined by a rotation north over east. As Effelsberg is the first complete LBA E-LOFAR station, it is suggested to use its layout and antenna/dipole positions as reference.

As the determination of the rotation angle could lead to misunderstanding it is proposed that the LOFAR project will determine the location of the antenna taking the described above into account and send them to the various E-LOFAR stations.

### Parallel dipoles

For the core and remote stations it has been advised to place all dipoles parallel to each other. This is on the one hand in support of calibration and on the other hand important for the tied array beam forming. At the distances of E-LOFAR stations it is no longer possible to have the dipoles parallel. On the one hand due to the curvature of the Earth and on the other allowing for inclined planes with levelled antennas.

The advantage of having the dipoles as parallel as possible to each other across stations is that it simplifies calibration.



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

## 2.5 Non-Astronomical applications (optional)

The optional third sensor field can contain e.g. sensors like geophones, hydrophones and infrasound sensors (such is the case for the Dutch sites)

In case that it is envisaged that the station should accommodate Non-Astronomical Applications as well, the following issues shall be accounted for:

- Any intention to accommodate an other application on or near a LOFAR shall be agreed with ASTRON/LOFAR
- Physical location: See section 2.1
- Power consumption/dissipation: The NAA power consumption has to be added to the site total power consumption, it is not foreseen in the astronomical power budget in section
- Data connection: To be inserted on the LOFAR network via the splice box/optical modules
- Data rate: To be agreed with LOFAR
- EMC requirements for any equipment installed: The maximum emission level for electronic equipment on a LOFAR site is 15 dBµV/m at 100 meters distance from the equipment [AD.6]. This excludes any additional requirements of e.g. a radio telescope that is located nearby.
- The Non-astronomical cabinet/electronics should be located as far as possible from the LBA/HBA fields, depending on the type of equipment and the expected level of RFI disturbance.
- The optional NAA cabinet should have an attenuation of > 40 dB over a range from 100 kHz 300 MHz.
- A non-astronomical application partner is given the opportunity to transfer the data from its equipment at a specific E-LOFAR site via the E-LOFAR data link of that site. In case the partner makes use of this option, a single 1000BASE-T port will be available per partner in the partner cabinet. This port will provide a connection to a 1000BASE-T port on the lightpath switch at the LOFAR central processor site at Groningen. Alternative connections will not be provided. For the non-astronomical application link the following should be taken into account:
  - The non-astronomical application data will be transferred via a single VLAN per partner. ASTRON/LOFAR will determine its VLAN ID.
  - The connection will provide a bandwidth with a maximum of 100Mb/s per direction per partner.
  - $\circ$   $\;$  The availability of the partner links cannot be guaranteed.
  - The partner has the responsibility to connect his equipment to the data transfer system in such a way that the LOFAR data link will not be endangered in any way. In case LOFAR/ASTRON notices any problems that originate from the partner's data link, it will be disconnected. In order to prevent such a situation the following preventive measures are required to be taken by the partner:
    - Installation of a firewall and intrusion detection system between the VLAN or the E-LOFAR station site systems and the Internet and /or other, non-LOFAR networks, which comply with the requirements of ASTRON / LOFAR
    - ASTRON/LOFAR will assess, together with the partner, the firewall and intrusion detection system, before the partner systems are connected to the ASTRON / LOFAR systems and also (regularly) during their connection to the ASTRON / LOFAR systems.
    - To avoid problems in the E-LOFAR data link, the partner must configure his traffic and link according to the guidelines provided by ASTRON/LOFAR
    - In case a partner detects an intrusion in one of his E-LOFAR systems, this should be directly (within 1 hour) reported to ASTRON / LOFAR.
    - To avoid problems in the E-LOFAR data link, only traffic and communication standards may be used that are compatible with the LOFAR network. For this ASTRON / LOFAR will provide specifications
  - The partner equipment will be placed in a separate cabinet. In this cabinet a Foundry LS648 (partner) switch is placed that will provide the 1000BASE-T connections to the partners. This partner switch will be connected to a switch in the E-LOFAR cabinet. Both switches are connected via a 1000BASE-LX optical connection. The fibre-optic cable and its terminations



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

that are needed for this connection must be designed, deployed and maintained in such a way that the mentioned 1000BASE-LX connection will function according to its specification. This cable must be terminated in both cabinets on patch panels with SC/PC patch positions.

 Any maintenance to the mentioned fibre-optic cable must be reported at least 1 week in advance. In case the announced maintenance does not concur with LOFAR scheduling the partner and LOFAR/ASTRON should agree a more suitable timeframe.



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	10 10 10 10 10 10 10 10 10 10 10 10 10 1

## 3 LOFAR Station site evaluation

The chapters in this section provide a set of basic issues that should be fulfilled in order to allow installation of a LOFAR site that will provide a performance that is compatible with the other stations in the LOFAR instrument. Violation of one of these items does not mean that the station will not work at all, but it may have impact on the performance. The goal should be to satisfy as many of these items as possible and in that case the station performance will be adequate.

Note that the sections below contain similar information as in section 2, but presented in the concise form of a detailed check list.

### 3.1 Site evaluation check list

This chapter provides the basic desired properties of the physical location and the site that will be favored for installation of a LOFAR station. It may be impossible to meet all items initially, but after discussion with LOFAR specialists and after evaluation of measurement data, improvements could be made in some areas, such as cutting a tree or forest line or changing a fence. No single item below, if not met, would make it impossible to establish a site at the preferred location, but more or less impact on the performance is possible. In case all statements below can be checked positively the performance will be best, if none of them are met the situation will have to be improved with certainty. Consultation of LOFAR specialists may be required to indicate which points need most attention.

Site evaluation check list:

Nr.	Description of statement	Check
1.	It is possible to fit one HBA field and one LBA field of each 75 x 75 m in	
	accordance with the possible configurations as indicated in Figure 2.1-1 and	
	Figure 2.1-2 including a service driveway on the selected site.	
2.	The draining of the site is such that (rain) water does not form puddles on	
	the ground planes of the LBA for periods longer than 30 minutes after a	
	period of heavy rainfall. Water on the ground planes will change the	
	performance of the LBAs.	
3.	The site shall be accessible via at least a macadam or sandy road	
4.	The station is not located within 2 km of any overhead high voltage power	
	lines (10 kV and higher)	
5.	The station is not located within 6 km of any radio or TV transmission station	
6.	The station is not located within 2 km of any railroad or tramway.	
7.	The station is not located within 2 km of any windmills in specific windmills	
	used to generate electrical power.	
8.	The station is not located within 500 m of any highway or roads with heavy	
	traffic	
9.	The station is not located within 500 m of any urban development	
10.	The station is not located within 100 m of forest, single high trees or	
	structures higher than 10 m	
11.	The land adjacent to the station south viewing border is cleared of any high	
	trees or structures higher than 20 m over a distance of 200 m	
12.	The site is not enclosed by metallic or electrified fences	



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

## 3.2 EMI/RFI environment

All electronic equipment, except the sensor electronics, is installed inside shielded outdoor cabinets. The level of shielding is sufficient for the LBA, HBA. The maximum emission level for a standard LOFAR cabinet is 15 dB $\mu$ V/m at 100 meters distance from the cabinet [AD.6]. The emission level is far below the CE requirements stated in [AD.1]. This standard cabinet provides 40 dB shielding and it is used for all sites in the Netherlands.

However, international stations are more often than not located on sites owned by scientific institutions where more sensitive sensors are present, such as large radio telescopes. Therefore a (certified) container is the standard option for sensitive sites. It provides sufficient shielding in the frequency range of 100 kHz up to 10GHz with an attenuation of > 80 dB.

A LOFAR station is a fixed installation and needs to comply with the new EMC directive 2004/108/EC from 20 July 2007 onwards. This means that no conformity assessment is necessary. Also CE marking is not necessary anymore. Only a responsible person and documentation of the station is necessary. A LOFAR installation complies with all applying CE requirements.

Nr.	Description of statement	Check
1.	Are the emission and immunity requirements for electronic equipment installed on or near the LOFAR site compatible with the mentioned E-field strength level?	

Note: In case an optional cabinet for other applications than astronomic will be placed, it should at least respect the points regarding RFI mentioned in 2.5..



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat		Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

## 4 Customer support

Once the site has been selected by the customer and agreed with LOFAR, a number of issues will have to be taken care of by the customer in order to prepare for the installation of the LOFAR station. These points are discussed in the following sections. In annex 5.4 an example illustrates how to build a LOFAR station in Dutch conditions.

The preparation will be declared finished after an evaluation by both the customer and LOFAR/ASTRON personnel and upon mutual agreement of the work that has been performed. A standard checklist and a suggestion for the agenda of the evaluation meeting is contained in annex 5.5.

## 4.1 Overview of support tasks

This chapter provides an overview of the support tasks of the customer and ASTRON/LOFAR. It serves as an indication of the boundaries of the responsibilities of both parties, but has not the intention to specify all binding conditions. The latter will be agreed in the contract.

The baseline will be that the customer will support LOFAR among other by performing site preparation work, where the following points are highlighted below:

- Site acquisition (RFI is a selection criterion, that has to be discussed with LOFAR)
- Site preparation (ground work)
- Placement of a concrete container foundation including cable feedthrough pipes
- HBA tile and LBA antenna placement including routing of coax cabling (in trenches) up to the container
- 3 phase mains cable up to connection on the main switchbox in the container
- data cable (glass fibre) including provision of a splice box and optical modules up to connection to the network switch equipment (switches are delivered by ASTRON/LOFAR)
- · Providing support during ASTRON/LOFAR integration and test work
- Support during operations and maintenance
- Providing the hardware mentioned in Table 4.6-1.
- Gluing of cable feedthrough pipe from delivered parts

In addition the customer will be responsible for safe working conditions for ASTRON/LOFAR personnel on the site in preparation and in related buildings.

Responsibilities during phases for ASTRON/LOFAR:

- Delivery of LBA parts, HBA tiles and parts, see Table 4.6-2
- Delivery of container including equipment, see Table 4.6-2
- · Integration of rack equipment in container
- Testing, concluding with acceptance
- Remote operations
- Astronomical data delivery
- Maintenance (preventive, corrective) (To be agreed in separate maintenance contract)
- Providing the Data Delivery Package (contains all relevant information regarding the delivered station)

## 4.2 Field preparation and equipment placing

Field preparation is an important issue and the customer is asked to carry out this work, gaining valuable experience regarding the preparation and installation of a LOFAR station.

The table below contains the more detailed steps that have to be taken in order to prepare for the installation of:



©ASTRON 2008

Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat		Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

- -
- HBA and LBA field preparation Container foundation and installation -

-

Antenna cable routing HBA and LBA placement, location and accuracy -

1.	The site, especially the HBA and LBA fields should be prepared by the customer in accordance with the specifications in section 2.1.3 and by considering the additional points montioned in chapter 2.4.
2.	mentioned in chapter 2.4. Coax cables have to be buried as protection against people, vehicles, rodents and for better temperature stability. A nominal depth of 0.60 m is recommended either in the natural soil or in an artificial layer of sand on e.g. a rocky soil. If the soil is an artificial layer it should be stabilized before the installation of antennas starts.
3.	Coax cables have to be handled carefully in order to allow all antennas to operate
	nominally:
	- personnel should not walk or stand on the (bare) cables (make trenches not too wide)
	<ul> <li>cable overlength should be buried in large loops without coiling of the cable</li> <li>sharp bending should be avoided (bending radius not less than 10 cm)</li> </ul>
	- connectors should be protected always against dirt and water until connection
	- protect cables against sharp rocks if buried in rocky soil
4.	The LBA and HBA field position and orientation should be determined and marked as
	guided by the site specific drawings (when available), taking into account the specific form
	and dimensions of the site at hand, see section 2. The general site reference drawing in
5.	annex 5.1 gives an example lay-out. The position and orientation of the container should be determined and marked as guided
J.	by the site specific drawings (when available), taking into account the specific form and
	dimensions of the site at hand, see section 2. In general can be said that the cable entry
	openings should be directed towards the antenna fields (yielding the shortest cable length).
	The general site reference drawing in annex 5.1 gives an example lay-out.
6.	The position and orientation of the 96 LBA should be determined and marked on the LBA
	field by means of small poles with an accuracy of 1 degree from the specified coordinates
	as indicated on the site specific drawings (when available). The LBA orientation should be determined with an accuracy of better than 1 degree.
7.	The position and orientation of the 96 HBA tiles should be determined and marked on the
	HBA field by means of small poles with an accuracy of 1 degree from the specified
	coordinates as indicated on the site specific drawings (when available). The HBA tile
	orientation should be determined with an accuracy of better than 1 degree.
8.	The LB antennas must be installed in accordance with the procedure provided as a
	separate document (see RD.8).
	Note: A plastic foil of 3 x 3 m is placed under the metallic groundplane of the LBA in order to
	prevent plant growth that may influence antenna characteristics. If the properties of the soil
	are already (or chosen) such that plant growth is inhibited by nature it can be considered to
	omit the foil.
9.	The HBA tiles must be installed either in accordance with the procedure provided as a
10	separate document (see RD.9) or will be placed on the site by the HBA supplier (TBD).
<u> </u>	The concrete foundation has to be cast in accordance with the drawing in annex 5.2. The concrete container foundation has to be provided with pipes to guide antenna cables
	and other cabling into the container in accordance with the drawing in annex 5.2.
12.	The container has to be placed on the concrete foundation in accordance with the drawing
	in annex 5.2
13.	The container needs to be grounded as explained in section 4.4.
14.	After installation of all LBA the exact antenna positions (of the LNA head) should be
	measured with an accuracy of $\pm 1$ cm, which will form the new reference set of antenna
	coordinates for astronomical observations



ASTRON 2008

Authors: H. K Koopman, M. Huigen, P. M	.J. Bentum, A.	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
		Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	
15.	accuracy		exact tile positions should be measured with the new reference set of antenna coordinate	

### 4.3 Infrastructure

This chapter describes the infrastructure that is needed to operate the station i.e. the power connection and the data connection. The data connection forms the umbilical with the LOFAR system and will be used to command and monitor the station and to transport the astronomical data to the central processor (CEP).

The power and data cables should be routed on the site in trenches after the cabinet has been placed, because this allows finishing off the cables in a proper environment thus avoiding unnecessary damage of the cables.

1.	The site should be provided with at least the following infrastructure:
	- mains power
	- data connection

### 4.3.1 Power infrastructure

	The mains power cable should be routed in to the container via the pipes in the foundation
2.	The mains power is a 3 phase mains 230/400 V connection with a minimum of 25 A per
	phase.
3.	The main fuses of the station are located in the container and have a value of 25 A per
	phase, therefore, the value of the fuse in the (public) mains distribution network to the
	station should not be higher than 40 A for reasons of safety (the value should be in line with
	the local rules)

### 4.3.2 Data transport infrastructure

For the intra-station communication and the E-LOFAR station communication to/from the outside world a 48port Foundry FastIron LS (FLS) switch is placed at each E-LOFAR station (E-LOFAR station switch). Via a fibreoptic cable, which must be provided by the E-LOFAR partner, the station switch is connected to a switch in a partner building. This switch, which is also part of the E-LOFAR station, will be used for forwarding of the data to the LOFAR central processor at Groningen or a local data processor (E-LOFAR routing switch). Both switches will be controlled by the LOFAR system control. The connection between these switches is realized using a 10GBASE-LX based link. The fibre-optic cable (and its terminations) between the E-LOFAR cabinet and the E-LOFAR partner building, that is used for connecting both E-LOFAR switches, must be designed, deployed and maintained in such a way that the mentioned 10GBASE-LX based link will function according to its specification.

The E-LOFAR partner must provide a 10GbE communication link, which connects a 10GBASE- LX port on the E-LOFAR routing switch to a 10GBASE- LX port on the lightpath switch at the central processor site at Groningen. The XFP's in these ports will be provided, controlled and maintained by LOFAR, as part of the E-LOFAR station. The remainder of the link (E-LOFAR connection link) should be provided, controlled and maintained by the E-LOFAR partner. For this latter link, ASTRON /LOFAR has detailed a number of availability, maintenance and security issues which are described in the table below and have to be followed up strictly for a flawless operation.



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

The E-LOFAR connection link that should be provided by the E-LOFAR partner, must be a layer 2 link that supports:

- 10GbE traffic
- o VLAN tagging and QinQ in case of a VLAN conflict
- The transfer of VLANs whose numbering will be determined by ASTRON / LOFAR
- o IPv4 and IPv6
- o 9kB Jumboframes
- Packet routing based on MAC addresses
- o TCP/IP

Description of the LOFAR data packet: .....To be added

Detailed Infrastructure and organizational issues:

1.	The fibre-optic cable between the E-LOFAR station switch and the E-LOFAR routing switch must be terminated at both sides on a patch panel with SC/PC patch positions.
2.	The fibre-optic cable and its terminations are configured, constructed and maintained in such a way that the E-LOFAR partner can realize a 10GbE connection via that cable.
3.	The data connection between the E-LOFAR forwarding switch and the lightpath switch should be transparent regarding transport of data to the CEP. In addition, the sequence of the data as produced by the station shall not be altered, first data bit produced by the station arrives first at CEP.
4.	The data connection between the E-LOFAR routing switch and the lightpath switch may not alter the data packets as they are sent out by the E-LOFAR routing switch
5.	Small amounts of packet loss ( <tbd between="" connection="" data="" e-<br="" in="" packets="" s)="" the="">LOFAR routing switch and the lightpath switch is only acceptable after approval of ASTRON / LOFAR</tbd>
6.	A high level of packet loss (>TBD packets/s) in the data connection between the E- LOFAR routing switch and the lightpath switch is not acceptable
7.	The data link between the E-LOFAR routing switch and the lightpath switch may not have a delay larger than 100 ms.
8.	<ul> <li>The 10GbE stream from a E-LOFAR station contains the following sub-streams: <ul> <li>a. Observation mode 1 with required bandwidth: 2.2 Gbps</li> <li>or: Observation mode 2 with required bandwidth: 4.4 Gbps</li> <li>b. Monitoring and Control with required bandwidth of 100 Mbps</li> <li>c. Network control with required bandwidth of 10 Mbps</li> <li>d. Transient Mode with a varying required bandwidth which is in the order of several Gbps</li> <li>e. EOR mode with a required bandwidth of 5 – 7 Gbps</li> <li>f. Eight non-astro partner streams each with a required bandwidth of 100 Mbps</li> </ul> </li> <li>Each stream will require its own VLAN. All mentioned streams will be needed in the final situation. Before upgrading at least item a, b and c need to be supported. An upgrade plan for the required bandwidth needs to be negotiated with each E-LOFAR partner.</li> </ul>
g.	Any maintenance to the fibre-optic cable between the E-LOFAR station switch and the E-LOFAR routing switch must be reported at least 1 week in advance. In case the announced maintenance does not concur with LOFAR scheduling the partner and



Authors: H. Kolle Koopman, M.J. E Huigen, P. Maat	Bentum, A.	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFA
		Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	
	LOFAR//	ASTRON should agree a mo	pre suitable timeframe.	
h.	lightpath announc	switch at Groningen must b	tween the E-LOFAR routing switch and the reported at least 1 week in advance. In poncur with LOFAR scheduling the partne more suitable timeframe.	n case the
i.	In case of failure in the fibre-optic infrastructure between the E-LOFAR station switch and the E-LOFAR routing switch, a report must be created by the E-LOFAR partner. This report contains an incident and a repair plan, which will be provided to ASTRON/LOFAR within 3 hours after the failure has been detected. The repair plan informs ASTRON / LOFAR about the nature of the failure and the schedule for the repair. In case the problem exists for several days, ASTRON/LOFAR will be informed daily on the status of the repair.			
j.	switch w	ill be configured and mainta	FAR station switch and the E-LOFAR rou ined by ASTRON / LOFAR. The local E-l ssistance in this configuration and mainte	LOFAR

k. In case of failure of the active equipment and / or failure in the fibre-optic infrastructure in the link between the E-LOFAR routing switch and the lightpath switch, an incident and repair plan must be made. This incident and a repair plan will be provided to ASTRON/LOFAR within 3 hours after the failure has been detected. The repair plan informs ASTRON / LOFAR about the nature of the failure and the schedule for the repair. In case the problem exists for several days, ASTRON/LOFAR will be informed daily on the status of the repair.

## Security and availability related items

The E-LOFAR partner has the responsibility to connect his equipment to the data transfer system in such a way that the LOFAR data link and connection to Central Processor at Groningen will not be endangered in any way. In case LOFAR/ASTRON notices any problems that originate from the partner's data link, it will be disconnected. In order to prevent such a situation the following preventive measures are strongly recommended to be taken by the partner:

1.	In case an intrusion is detected in the active equipment that is placed in the link
	between the E-LOFAR routing switch and the lightpath interface switch, this should be
	directly (within 1 hour) reported to ASTRON / LOFAR (TBC LOFAR control room)
2.	In case a connection between an E-LOFAR station and the lightpath switch at
	Groningen is suspected to be intruded/corrupted and/or is causing problems in the
	LOFAR Central Processor system at Groningen, ASTRON / LOFAR will disconnect
	this connection immediately. After the E-LOFAR partner has shown that the mentioned
	issues are removed / not present the link will be restored.
3.	An E-LOFAR partner has the responsibility to provide a secure link in accordance with
	the ASTRON/LOFAR standards (TBD).
	N.B.: The security of the link will be assessed based on information provided by the E-
	LOFAR partner regarding the link between the E-LOFAR station and the lightpath
	switch at Groningen.
4.	An E-LOFAR partner has the responsibility to provide a qualitative good link with
	proper availability.



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat		Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	
		Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	Corran
5.	connec supply	ted to the LOFAR system a report in which the cons	FAR station and the lightpath switch at Gr s at Groningen, the involved E-LOFAR pa truction and configuration of the link is des t, the quality of the link will be assessed.	rtner has to
6.	Interne intrusio	t and /or other, non-LOFA	nts to connect his local data processor sys R networks, he has to install a proper firevent en the local data processor system and th	wall and

## 4.4 Safety

Safety measures have to be taken by the customer in order to protect personnel and equipment for:

- Electrocution
- Lightning
- ESD
- Fire

The table below details the above mentioned issues:

1110 100	
1.	Near the concrete foundation of the container earthing electrodes have to be driven into the
	ground and connected to the container structure serving as earthing connection for personnel
	safety and equipment grounding reference.
2.	The Container earthing electrodes shall have a maximum resistance of 2.5 ohm.
1.	The GPS antenna needs to be protected with a lightning rod.
3.	Near the concrete foundation of the container earthing electrodes shall be drilled into the
	ground that shall be connected to the lightning rod mounted on the container.
4.	All safety and lightning earthing installation work shall be performed by a certified company and
	in accordance with local and/or European standards.
5.	During maintenance activities that include handling of electronic boards sufficient ESD
	preventive measures shall be taken, such as wrist grounding straps connected to a grounding
	point and using ESD safe packing material.

### Fire prevention:

The container does not contain any means to prevent fire or to extinguish fire. However, temperatures are measured at several places and hotspots in the equipment racks. The temperatures are monitored by the LCU and passed to the LOFAR Monitoring And Command (MAC) system. MAC will give alarm messages to the operators or take autonomous actions like switching off equipment in case of emergency.



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

## 4.5 Resources and logistics

In order to achieve an efficient installation of a LOFAR station on the desired location, the customer will be asked carry out some work and to support LOFAR/ASTRON during the preparation and installation periods. This chapter discusses the resources expected to be provided by or via the customer during preparation and installation of the LOFAR station.

Measurement of antenna positions etc. is usually performed best by local specialized companies. A reference schedule will provide the logic and expected throughput times during the preparation and installation period, see annex 5.3. LOFAR/ASTRON personnel will arrive and carry on with the electronics installation when the preparation of the site has been finished.

To familiarize with preparations and equipment it is suggested that the customer sends a representative to LOFAR/ASTRON in order to get hands-on experience.

The table below details the expected support:

THE lai	Die below details the expected support.
1.	The customer should provide all necessary resources during the site preparation period as indicated in the previous sections of this chapter (LOFAR/ASTRON personnel will be
	available for consultancy if necessary on-site)
2.	The customer will agree a schedule and workflow as e.g. shown in annex 5.3 with
	LOFAR/ASTRON.
1.	The customer should provide at least the following personnel and equipment to carry out
	the jobs mentioned in sections 4.1, 4.2, 4.3 and 4.4:
	<ul> <li>For installation of LBA groundplanes and antennas at least 2 persons</li> </ul>
	<li>b. For installation of HBA tiles at least 2 persons and crane including driver.</li>
	c. For placement of the equipment container 2 persons and crane including driver.
1.	
	ASTRON/LOFAR to support the ASTRON personnel. *)
	*) For an efficient electronics installation, the customer should provide sufficiently skilled
	resources to support the LOFAR/ASTRON personnel (e.g. people with hands on-
	experience as suggested above).
3.	
	foundation etc, adequate equipment and personnel should be available to perform this job
	in line with the preparation schedule of annex 5.3.
4.	Near the container, on the site, a (temporary) shelter for personnel and for temporary
	storage of equipment should be available in order to allow for an efficient electronics
	installation in the container.
5.	In case no equipment storage near the container is possible, it may be an option that
	customer personnel brings the equipment as requested by the ASTRON/LOFAR
	personnel.
1.	
1.	
	present and in case there are no nearby facilities.



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

## 4.6 Deliverable items list

The table below specifies the hardware that will be furnished by ASTRON/LOFAR during the preparation work supported by the customer.

Item	Number	Remark
LBA LNAs, including springs and cords.	96	
LBA poles/pegs	96 sets	
Container with RF-tight compartment	1	
HBA tiles	96	
LBA Coax cables	192	Different sizes
HBA Coax cables	192	Different sizes
Cable feed through pipes	6 sets	

### Table 4.6-1 Hardware delivered by ASTRON/LOFAR

In the table below the hardware is listed that is expected to be delivered or provided locally by the customer mainly because of practical reasons:

Item	Number	Remark	
LBA ground plane mesh	96		
LBA ground plane foil	96	(TBC)	
Splice box including optical modules	1		
Concrete structure for the RF-tight container	1		
Power connection	1		
Data connection	1		


Table 4.6-2 Hardware delivered by the customer



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	


## **5** Annexes

## 5.1 Annex 1 Reference site layout (examples)

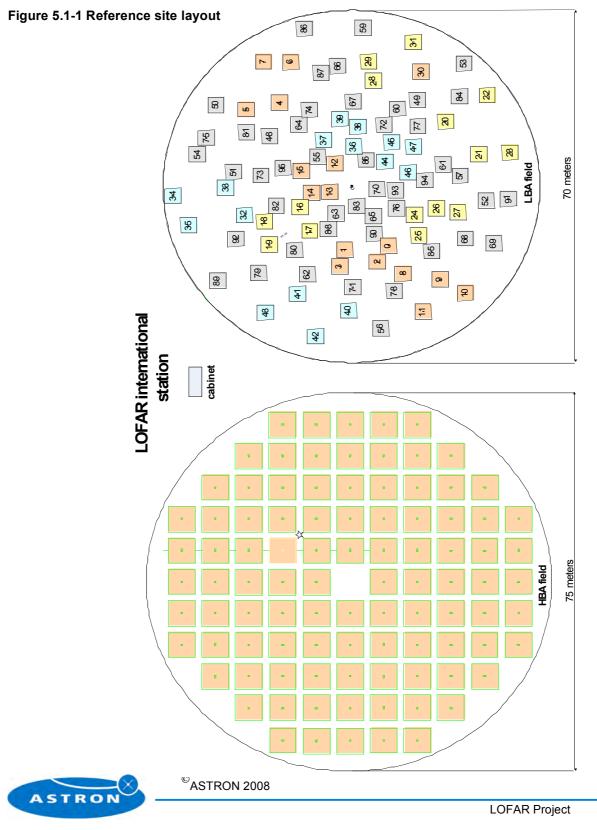

Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat		Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	


### Figure 5.1-2 Example LBA layout Garching

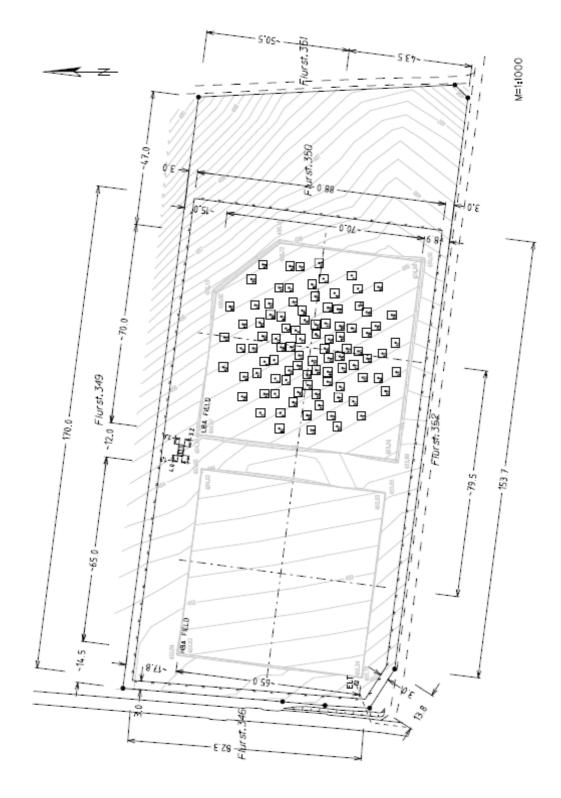



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat		Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR	
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc		

## 5.2 Annex 2 Container foundation drawing

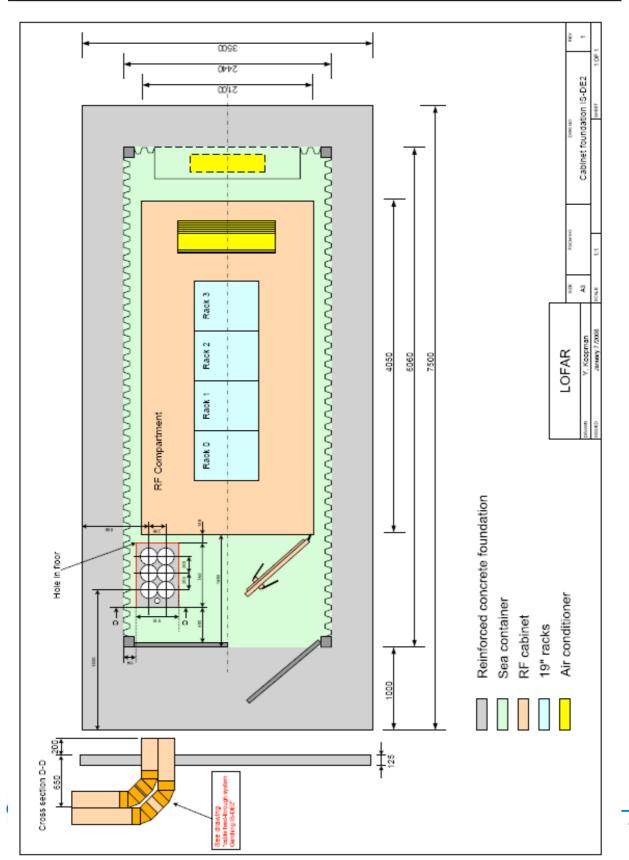

Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

The Placement of the concrete foundation:

Before the foundation can be cast, the six plastic tubes (see figures below) have to be placed first in the correct position underneath the place where the foundation will be. The tubes should stick out 20cm above the foundation (as indicated in the drawing). The thickness of the foundation (suggested in the drawing to be 12.5cm) is only a suggestion and needs to be determined dependent on the local ground properties.

The small hole in the drawing represents the entrance for power (3 phases) and the fibre cables, which also have to be in place before the foundation for the container is cast. Actually, there should be two holes in the drawing representing two plastic tubes that are sufficient to encompass the power and fibre cable that should be placed before the foundation is cast.

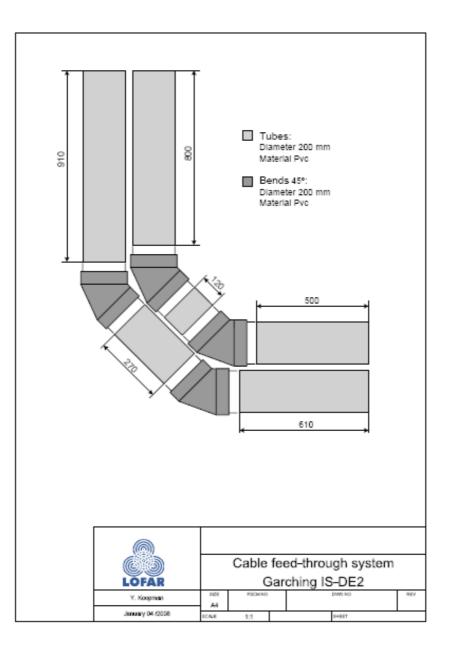






Figure 5.2-1: Example of the plastic tubes for the antenna cables as defined in the drawing above.



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

## 5.3 Annex 3 Reference schedule for preparations

							38 37 38 30 40 41 42 43 44 45
-	International station preparation and installaltion	tion and installaltion	40.5 d	Mon 01-09-08	Mon 27-10-08		
5	Site preparations		30 d	Mon 01-09-08	Fri 10-10-08		
m	Determine position LBA, HBA field	BA, HBA field and container	2 d	Mon 01-09-08	Tue 02-09-08		International site resources
4	Temporary access roads (if required)	bads (if required)	0.5 d	Wed 03-09-08	Wed 03-09-08		International site resources
ю	Remove growth (if required)	equired)	1 d	Wed 03-09-08	Thu 04-09-08	4	International site resources
0	Fill in sand for contail	Fill in sand for container & dirt or sand for antenna fields	1 d	Thu 04-09-08	Fri 05-09-08	2	International site resources
2	Placing of mobile canteen & toilet	nteen & toilet	0.5 d	Fri 05-09-08	Fri 05-09-08	0	Huternational site resources
œ	Leve ng of LBA and HBA sections	HBA sections	2 d	Mon 08-09-08	Tue 09-09-08	7	International site resources
8	Inspection point (recommended)	ommended)	рo	Tue 09-09-08	Tue 09-09-08		60-60
6	Grounding rods (reference, safety)	irence, safety)	2 d	Wed 10-09-08	Thu 11-09-08	0	International site resources
7	Preparation of container foundation	iner foundation incl. cable feedthrough pip	8 d	Wed 10-09-08	Fri 19-09-08		International site resources
5	Inspection point (recommended)	ommended)	PO	Fri 19-09-08	Fri 19-09-08	:	● 19-09
5	Foundation placement (concrete casting)	nt (concrete casting)	1 d	Mon 22-09-08	Mon 22-09-08	12	International site resources
4	Concrete setting time (minimum 1 week)	e (minimum 1 week)	5 d	Tue 23-09-08	Mon 29-09-08	13	International site resources
15	Container placement		0.5 d	Tue 30-09-08	Tue 30-09-08	4	International site resources
16	Installation of optical splice box and	splice box and modules	0.5 d	Tue 30-09-08	Tue 30-09-08	15	International site resources
4	Data connection last	Data connection last mile deployment and connection	0.5 d	Wed 01-10-08	Wed 01-10-08	16	International site resources
₽	Power last m <sup>-</sup> e deplo	Power last mile deployment and connection	0.5 d	Wed 01-10-08	Wed 01-10-08	17	International site resources
19	LBA/HBA position me	LBA/HBA position measurements/marking	3 d	Wed 10-09-08	Fri 12-09-08		Anternational site resources
20	LBA Coax routing & digging	digging	5 d	Mon 15-09-08	Fri 19-09-08	19	International site resources
51	HBA Coax routing & digging	digging	5 d	Mon 22-09-08	Fri 26-09-08	20	International site resources
ន	LBA assembly, placement & connection	ement & connection	5 d	Mon 22-09-08	Fri 26-09-08	20	International site resources
53	HBA assembly, placement & connection	ement & connection	5 d	Mon 29-09-08	Fri 03-10-08	21	International site resources
54	Connect coax cables to RF	s to RF panel interface	2 d	Mon 06-10-08	Tue 07-10-08	22,23	International site resources
26	Final access road (if required)	required)	PO	Tue 07-10-08	Tue 07-10-08	24	]
26	Sowing of grass (if required)	equired)	2 d	Wed 08-10-08	Thu 09-10-08	25	International site resources
27	Final inspection site p	Final inspection site preparations (mandatory)	1 d	Fri 10-10-08	Fri 10-10-08	26	◆ 10-10
28	Contingency (weather, problems)	er, problems)	PO	Fri 10-10-08	Fri 10-10-08	27	 
29	Station Integration and Test	Test	P 6	Mon 13-10-08	Thu 23-10-08	2	ļ
8	Container equipment Integration	nt Integration	4 d	Mon 13-10-08	Thu 16-10-08		
		Task	Milestone	•		External Tasks	Tasks
roject: ate: M	Project: RO-sched station preps intern Date: Mon 04-02-08	Split	Summary	ary (	ľ	External /	External Milestone 🔶
		Progress	Projec	Project Summary		Deadline	¢



Statistic Eurol Benison un: 1 '43         Lie usume: SBS_018_18st Lies4_1001         Lie usume: SBS_018_18st Lies4_1001         Condition Condition         Condition         Condition <thcondition< th="">         Condit Condition</thcondition<>	en, Y. Bentum,	A.						ue: ue:			908												R/se STF		I-SF	s-	019		C	LC	26
Alt         Duration         Start         Finitin         Procision         State         Procision         Procision <th< th=""><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>1.43</th><th>3</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>File</th><th>e na</th><th>me:</th><th>SRS</th><th>6_0</th><th>19_</th><th>iss1</th><th>rev4</th><th>4_iı</th><th>nt-site.doc</th><th></th><th>her</th><th></th><th></th></th<>									1.43	3								File	e na	me:	SRS	6_0	19_	iss1	rev4	4_iı	nt-site.doc		her		
Duration         Start         Finish         Predecent           ec.         0.5 d         Mon 13-10-08         Mon 13-10-08         Non 13-10-08         Non 13-10-08         Non 13-10-08         Non 13-10-08         Non 13-10-08         Non 13-10-08         No           & first switch-on         0.25 d         Mon 13-10-08         Mon 13-10-08         No	October	38 39 40 41 42 43 44	TAK: PK	TK: PR	YK: PR	YK: PR	YK; PR	YK; PR	YK; PR	YK: PR	YK: PR	YK: PR	YK: PR		YK: WN	YK: MN; KS	YK: MN; KS	YK; WN; KS	AK; MN: KS	AK: MN; KS	YK; WN: KS	TYK; MN; KS	23-10		NW	MN:YK:MJB	MN, YK:MJ				
Duration         Start           etc.         0.5 d         Mon 13-10-08           & first switch-on         0.25 d         Wed 15-10-08           & stimulation         0.25 d         Wed 15-10-08           & stimulation         0.25 d         Wed 15-10-08           ation & check         0.26 d         Wed 15-10-08           ation & scheck         0.26 d         Wed 15-10-08           ation         0.26 d         Wed 15-10-08           ation         0.26 d         Wed 15-10-08           ation         0.26 d         Mon 20-10-08           Mon scheck         0.5 d         Mon 20-10-08           ation         0.5 d         Mon 22-10-08           Set SW, test set         0.5 d         Med 22-10-08           blems)         0.5 d	Predeces					Tue 14-10-08 33							Thu 16-10-08 40	Thu 23-10-08 30	Fri 17-10-08	Fri 17-10-08 43	Mon 20-10-08 44	Mon 20-10-08 45	Tue 21-10-08 46	Wed 22-10-08 47	Ned 22-10-08 48	Thu 23-10-08 49	Thu 23-10-08 50	Mon 27-10-08 42				ar Louise		Deadline	
etc. Dura etc. 0 8 first switch-on 0 1 installation 0 0 attion & check 0 0 2 attion 0 0 0 0 0 2 attion 0 0 0 0 0 0 2 attion 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Start				_							Thu 16-10-08			Fri 17-10-08										Fri 24-10-08					summary	
etc. & first switch- etcn & check ation & check installation ation RCU' is aterial (temp beest SW, test s est SW, test s blems) blems)	Duration	740	0.00	0.25 0	0.25 d	0.25 d	0.25 d	0.5 d	0.25 d	0.25 d	0.5 d	0.5 d	0.5 d	5 d	0.5 d	0.5 d	0.5 d	0.5 d	1d	0.5 d	0.5 d	1d	PO	1.5 d	0.5 d	0.5 d	0.5 d	Milocton	Milesio		
Mounting of subr Line filters and d Install Power con Power supplies LCU installation Network equipmo GPS receiver an Rubidium clock u Cables from RF1 internal cablingic Miscellaneous it Miscellaneous it Miscellaneous it Miscellaneous it Miscellaneous it Miscellaneous it Miscellaneous it Miscellaneous it Miscellaneous it Network with Coperational test Departitional test Station-Central s Preparation for a contingency (we otest inver to customen inver to customen on preps intern			Tacks	listribution etc.	nnections & first switch-on			Network equipment installation & check	GPS receiver and antenna installation	Rubidium clock unit installation	Cables from RF interface panel to RCU's	Internal cabling/connections	Miscellaneous items and material (temp sensors)	I/F check & Testing station 1	Basic checks with BITE, test SW, test set	Start up & test WAN	MAC Local check-out	Receiver chain test	Operational tests (mem-179 Eng test plan)	beamformer tests	Station-Central systems tests	acceptance/handover	Contingency (weather, problems)			4OC	handover to customer	1.00	1938	ssa	
	₽	2	5	32	83	34	35	38	37	8	8	4	4	4	\$	4	45	46	47	48	49	20	51	53	8	5	8		Project:	Date: Mon 04-02-08	



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

## 5.4 Annex 4 LOFAR station building example

The following pages serve as an example regarding the construction of a LOFAR station in the Netherlands.


Note that the station electronics are mounted in cabinet as appropriate for the Dutch site conditions and not in the RF-tight compartment of a modified sea container that is proposed to be used for international sites.

### HOW TO BUILD A LOFAR STATION

In this document a brief overview is given how a LOFAR station is build up. This can be seen as an impression how to build a LOFAR station.

### **Configuration**

In the Figure below the configuration of the Low Band Antennas is shown for international stations. The distance between the antennas is not the same. This configuration of the 96 antennas must be rotated with an angle which will be delivered at the time of installation.

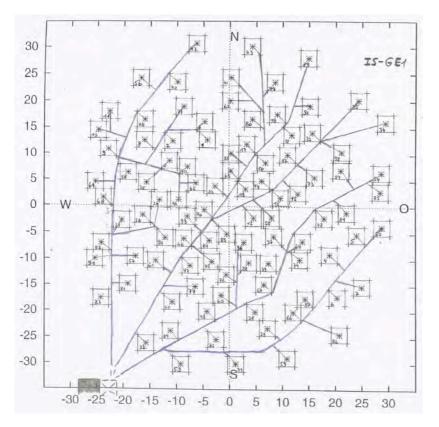

### The scale is in meters.

The position accuracy is plus or minus 6 cm for the LBA field (see section 2.1.3). After placement of the antennas, all the positions must be measured (again) with an accuracy of 1 cm. These numbers will be fed into the station software.



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat		Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

All the antennas are connected to a central cabinet with coax cables up to 110 meters. Each antenna has two of these cables, making the total number of cables 192. The cables are placed in trenches of approximately 60 cm deep (see also section 2.1.3. for specifications)

### Placement of the antennas.

The first thing to do at the field is flattening the ground. It is allowed to place the whole field under a certain angle (as long as the angle is known).

The next step is the construction of a concrete construction with 8 tubes into the ground. In these tubes the cables will be fed from under the ground towards the cabinet. Be aware that this is an image of the stations in the Netherlands using the standard LOFAR cabinet. For international stations a different cabinet is used with different requirements for the tubes in the concrete construction.



After the construction of the concrete platform the cabinet can be placed on this construction.



The cabinet consists of 4 compartments. The first three are used for the receiver units and the digital processing. The fourth compartment is for control, power connections, rubidium clock, local control unit etc.

The next thing to do is placing the antennas one by one:



©ASTRON 2008

Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

## <u>Step 1</u>



After all the positions were measured (by a geodetic company) and marked with a small wooden stick. A small crane created a trench for the 2 coax cables for the antenna.

### <u>Step 2</u>



The two cables are placed and the ground is made flat again (by hand).

### Step 3





Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat		Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

A foil\* of 3x3 meter is placed. A small hole for the two cables in the middle is made. The orientation is exactly in the wind directions. This can easily been done because a second maker (wooden stick) is made exactly towards the north.

\* The foil is placed under the metallic groundplane in order to prevent plant growth that may influence antenna characteristics. If the properties of the soil are already (or chosen) such that plant growth is inhibited by nature the foil can be omitted.

### Step 4



The groundplane is placed, also exactly in the wind directions. The groundplane is part of the antenna and will create a bundle towards the sky. This groundplane is "normal" construction steel (for concrete constructions) with the exception that all the crossings of the wires are welded (this is not normal for this material).

### Step 5



The 2 coax cables are fed into a prepared tube of exactly 1.7 meters.



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat		Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

### <u>Step 6</u>



The antenna is connected with the two coax cables. There is a hole in the antenna such that the tube perfectly fits in the potted LBA.

### <u>Step 7</u>



The tube has little slots in the bottom which make a perfect fit on the grid of the wire mess. The two antenna cables have a little over length at the bottom, to assemble but also disassemble the antenna easily.



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

### <u>Step 8</u>



Then the 4 tension cord/springs (2 arms of the antenna have tension cords, the other two springs) are connected by 4 ground pins.

And so  $\dots$ 



The Low Band Antenna is ready.

You see two wraps of the cables. All the cables are labeled. The lowest number is connected to the X polarization of the antenna and the highest to the Y polarization.

The following step is to dig trenches and place the cables into it. No windings are allowed. An impression:



Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	





Finally the field looks like this:





Authors: H. Kollen, Y. Koopman, M.J. Bentum, A. Huigen, P. Maat	Date of issue: 1-06-2008 Kind of issue: limited	Scope: wp/LOFAR/ses Doc.id : LOFAR-ASTRON-SRS-019	LOFAR
	Status: Final Revision nr: 1.43	File name:SRS_019_iss1rev4_int-site.doc	

## 5.5 Annex 5 Inspection checklist

This checklist will be used for the evaluation of the site preparations and will be added to the Minutes of Meeting (MoM) in which additional remarks and open work can be recorded. In case the outcome of the inspection is "less suitable" it means that the MoM will contain the actions to be taken in order to improve the situation.

The MoM agenda should consider the following items:

- 1. As-Built information/documentation
- 2. Site inspection results
- 3. Deviations and problems
- 4. Critical issues (including safety hazards)
- 5. Discussion of the Data Delivery Package (DDP)
- 6. Action items
- 7. Filling/signing and adding of Inspection check list



Authors: H. Kollen, Y.	Date of issue: 1-06-2008	Scope: wp/LOFAR/ses	
Koopman, M.J. Bentum, A.	Kind of issue: limited	Doc.id : LOFAR-ASTRON-SRS-019	
Huigen, P. Maat			C.
<b>u</b>			



Yes

No

## LOFAR Site preparations checklist

Customer: .....

Station location: .....

Station name/number: ...../...../

Date of inspection: .....

LOFAR representative: .....

Customer representative: .....

Items to be chec	cked during the	inspection:
------------------	-----------------	-------------

1.	Is the site evaluation checklist of section 3.1 completed and agreed?	
2.	Is the EMC evaluation checklist of section 3.2 completed and agreed?	
3.	Are the field preparations completed and agreed, see section 4.2?	
4.	Are the Infrastructure elements available, see section 4.3?	
5.	Are the Safety measures completed and agreed of section 4.4, including earthing resistance measurement report?	
6.	Are problem reports and deviations available?(if applicable)?	
7.	Are the antenna position measurement results available?	

The Station preparations at the location mentioned above are:

□ Less suitable site for a LOFAR station if one or more items of above list indicate "No". See the MoM for possible improvement activities and suggestions.

D Recommended to continue the station built up if all items indicate "Yes"

Signatures of:

Customer representative:

LOFAR representative:

This sheet has to be added to the MoM written after the inspection

